

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



AI

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

H04Q 7/20

A1

(11) International Publication Number:

WO 96/34500

(43) International Publication Date:

31 October 1996 (31.10.96)

(21) International Application Number: PCT/SE96/00389

(22) International Filing Date: 26 March 1996 (26.03.96)

(30) Priority Data:

08/430,831

28 April 1995 (28.04.95)

US

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON
(publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventor: DUFOUR, Daniel; 62 43rd Avenue East, Blainville,
Quebec J7C 3M7 (CA).

(74) Agents: BOHLIN, Björn et al.; Telefonaktiebolaget LM Ericsson,
Patent and Trademark Dept., S-126 25 Stockholm (SE).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: SYSTEM AND METHOD FOR RESTRICTING MOBILITY OF SUBSCRIBERS ASSIGNED TO FIXED SUBSCRIPTION AREAS IN A CELLULAR TELECOMMUNICATIONS NETWORK

(57) Abstract

A system and method of restricting an on-going call of a fixed subscriber to a fixed subscription area (FSA) in a cellular telecommunication system having a plurality of cells (C1-C10) and a plurality of subscribers. The plurality of subscribers includes at least one fixed subscriber assigned to the FSA and engaged in an on-going call in a serving cell. The system and method detect when the fixed subscriber is crossing a cell border between the serving cell and a neighbor cell, determine whether the neighbor cell is located in the FSA, and drop the on-going call of the fixed subscriber upon determining that the neighbor cell is located outside the FSA.

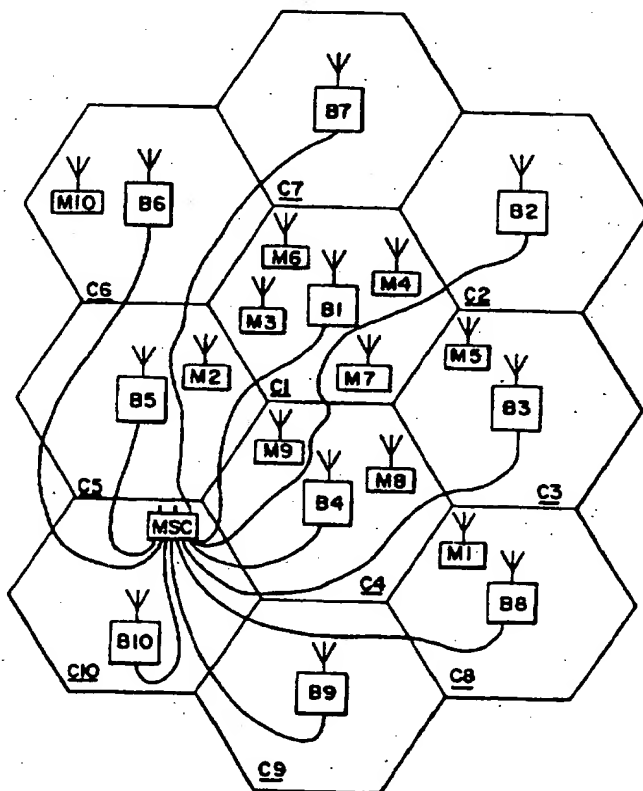

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

SYSTEM AND METHOD FOR RESTRICTING MOBILITY OF
SUBSCRIBERS ASSIGNED TO FIXED SUBSCRIPTION AREAS IN A
CELLULAR TELECOMMUNICATIONS NETWORK

5 BACKGROUND OF THE INVENTION

Technical Field of the Invention

This invention relates to cellular radio telecommunication systems and, more particularly, to a system and method of for restricting the mobility of subscribers assigned to fixed subscription areas (FSAs) in a cellular telecommunications network.

Description of Related Art

As the use of cellular telephones spreads, the number of network operators who compete to provide telecommunication services to subscribers is also increasing. Each operator, moreover, desires to offer unique services which distinguish the operator from its competitors. One such way to distinguish the service provided to subscribers is to offer increased levels of individual service tailoring. Today, only limited tailoring of individual services has been implemented. For example, operators may now offer subscribers a choice of subscription areas such as having cellular service only in a downtown area, or for a higher cost, having service which includes both the downtown area and the suburbs as well. Subscribers with geographically limited access rights are referred to as "fixed subscribers" and are generally equipped with either a fixed cellular terminal or a mobile station.

A major problem with existing methods of limiting individual service to a fixed subscription area (FSA) is that the limits are only effective at system access, i.e., call origination or termination. Existing cellular systems perform a verification process to determine if a subscriber is authorized to place or receive a call from the cell in which the subscriber is located, but the verification process is only performed at system access.

-2-

Existing systems do not perform subscriber verification at handoff; therefore, once a fixed subscriber places a call in an authorized FSA, the subscriber may continue the call, even if the subscriber roams outside the authorized area. Thus, once a call is in progress, a fixed subscriber may roam from cell to cell throughout the entire coverage area of the network.

System operators obviously lose revenue when fixed subscribers pay a lower fee for a restricted subscription area and then roam freely into unauthorized areas once calls are begun. However, this unauthorized roaming also causes another serious problem. The cellular system is programmed with information that indicates that a fixed subscriber is limited to operating within the subscriber's restricted or fixed subscription area (FSA). An FSA is defined as one or more regions of cells within which fixed subscribers are allowed to receive and place calls. When a voice channel is assigned to the fixed subscriber, the cellular system may also assign the same channel or adjacent channels to subscribers in areas outside the fixed subscriber's FSA. If the fixed subscriber remains within the authorized FSA, there is normally no problem. However, if the fixed subscriber roams outside the authorized FSA, there is a higher chance of co-channel and adjacent channel interference between authorized subscribers in that area and the unauthorized fixed subscriber.

For a cellular system to control both fixed subscribers and mobile subscribers, the system must be able to identify each type of subscriber and access information regarding each fixed subscriber's authorized FSA. Additionally, when required, cellular systems must be prohibited from handing off fixed subscribers to cells outside their FSA. For fixed subscribers with subscription areas comprising a single cell, this means the system may not allow handoffs of those subscribers at all. The cellular systems must, at the same time, allow

-3-

handoffs of fixed subscribers between authorized cells in FSAs comprising more than one cell, while prohibiting handoff to cells outside the FSA. Meanwhile, mobile subscribers must be able to roam freely to any cell of their choosing. To avoid co-channel and adjacent channel interference between single-cell fixed subscribers, multi-cell fixed subscribers, and mobile subscribers with unrestricted mobility, a mechanism is needed to limit the mobility of fixed subscribers after a call is initiated.

It would be a distinct advantage to have a cellular radio telecommunication system with the capability to identify and drop calls from fixed subscribers who travel out of their authorized FSAs after a call is initiated. Additionally, it would be advantageous for such a cellular system to provide a warning to fixed subscribers during the call that their call may be dropped. The present invention provides such a system.

SUMMARY OF THE INVENTION

In one aspect, the present invention is a cellular telecommunication system which detects fixed subscribers crossing handoff borders and either enables a handoff function or disables the handoff function and drops the call.

In another aspect, the present invention is a cellular telecommunication system having a plurality of cells and a plurality of subscribers. The plurality of subscribers includes at least one fixed subscriber assigned to a fixed subscription area (FSA) engaged in an on-going call in a serving cell. The system includes a mobile switching center (MSC), and a plurality of base stations electronically connected to the MSC and transmitting radio frequency signals over coverage areas defining the cells. The system also includes a restricted mobility function for restricting the on-going call of the fixed subscriber to the FSA.

-4-

In another aspect, the present invention is a method of restricting an on-going call of a fixed subscriber to a fixed subscription area (FSA) in a cellular telecommunication system having a plurality of cells and a plurality of subscribers. The plurality of subscribers includes at least one fixed subscriber assigned to the FSA and engaged in an on-going call in a serving cell. The method comprises the steps of detecting when the fixed subscriber is crossing a cell border between the serving cell and a neighbor cell, determining whether the neighbor cell is located in the FSA, and dropping the on-going call of the fixed subscriber upon determining that the neighbor cell is located outside the FSA.

15 BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better understood and its numerous objects and advantages will become more apparent to those skilled in the art by reference to the following drawing, in conjunction with the accompanying specification, in which:

20 FIG. 1 (Prior art) is a block diagram illustrating components of a cellular radio telecommunication system associated with the present invention;

25 FIGS. 2A and 2B are a flow chart illustrating the functions performed by the present invention when restricting the mobility of a fixed subscriber; and

30 FIGS. 3A and 3B are a flow chart illustrating the functions performed by the Call Out of Cell process in parallel with the functions illustrated in FIGS. 2A and 2B.

DETAILED DESCRIPTION OF EMBODIMENTS

35 The present invention comprises a cellular radio telecommunication system which detects fixed subscribers crossing handoff borders and either enables a handoff function or disables the handoff function and drops the call. The decision to handoff or drop depends on the

-5-

subscriber's status, whether a restricted mobility function is active in the subscriber's serving cell, the border being crossed, and the number of times the system detects the subscriber at the handoff boundary within a predetermined period of time.

A new restricted mobility function which includes a "Call Out of Cell" process enables the cellular system to perform these tasks. The function detects a fixed subscriber crossing a handoff border upon receipt of an intercell handoff request. However, instead of handing off the subscriber, the function waits for a predetermined time period defined by the operator, and then determines whether or not to drop the call. If a call is an emergency call, or a call to an operator, the restricted mobility function may be disabled for the duration of the call.

Referring first to FIG. 1, there is illustrated a conventional cellular radio telecommunication system of the type to which the present invention may generally pertain. In FIG. 1, an arbitrary geographic area may be divided into a plurality of continuous radio coverage areas, or cells C1-C10. Although the system of FIG. 1 is illustratively shown to only include 10 cells, it should be clearly understood that in practice, the number of cells would be much larger.

Associated with and located within each of the cells C1-C10, is a base station designated as a corresponding one of a plurality of base stations B1-B10. Each of the base stations B1-B10 includes a transmitter, receiver, and a base station controller as are well known in the art. In FIG. 1, the base stations B1-B10 are selected to be located at the center of each of the cells C1-C10, respectively, and are equipped with omni-directional antennas. However, in other configurations of a cellular radio system, the base stations B1-B10 may be located near the periphery, or otherwise away from the centers of the cells C1-C10 and may illuminate the cells C1-C10 with

-6-

radio signals either omni-directionally or directionally. Therefore, the representation of the cellular radio system of FIG. 1 is for purposes of illustration only and is not intended as a limitation on the possible implementations of a mobile radio telecommunication system within which a mobility restriction process may be implemented.

Continuing reference to FIG. 1, a plurality of mobile stations M1-M10 will be found within the cells C1-C10. Again, only ten mobile stations are shown in FIG. 1, but it should be understood that the actual number of mobile stations will be much larger and, in practice, will invariably greatly exceed the number of base stations. Moreover, mobile stations M1-M10 are illustrated in some of the cells C1-C10. The presence or absence of mobile stations in any particular one of the cells C1-C10 should be understood to depend, in practice on the individual desires of subscribers utilizing the mobile stations M1-M10. Subscribers may roam from one location in a cell to another, or from one cell to an adjacent cell or neighboring cell, and even from one cellular radio system served by a mobile switching center (MSC) 11 to another such system all the while receiving and placing calls both within the cellular system 10 as well as the public switch telecommunication network (PSTN) 12 which is connected to the MSC 11.

Each of the mobile stations M1-M10 is capable of initiating or receiving a telephone call through one or more of the base stations B1-B10 and the MSC 11. Such calls may be either for voice or data communications. The MSC 11 is connected by communication links 13 (e.g., cables) to each of the illustrative base stations B1-B10 and the PSTN 12 or a similar fixed network which may include an integrated services digital network (ISDN) facility (not shown). The relevant connections between the MSC 11 and the base stations B1-B10, or between the MSC 11 and the PSTN 12, are not completely shown in FIG. 1 but are well known to those of ordinary skill in the

-7-

art. Similarly, it is also known to include more than one mobile switching center (MSC) in the cellular radio system and to connect each additional MSC to a different group of base stations and to other MSCs via cables or radio links.

Each of the cells C1-C10 is allocated a plurality of voice or speech channels and at least one access or control channel, such as a forward control channel (FOCC). The control channel is used to control or supervise the operation of the mobile station by means of information transmitted and received from those units, referred to as messages. Control and administration messages within a cellular radio system are sent in accordance with industry established air interface standards, such as AMPS and EIA/TIA 553, the standards for analog cellular operations, and/or D-AMPS, IS-54B, and the proposed IS-136, the standards for digital cellular operations, all of which are hereby incorporated by reference herein. While these standards govern North American operations, similar standards govern other geographic areas throughout the world, and are well known to those skilled in the art.

The information exchanged between base stations and mobile stations via messages, may include incoming call signals, outgoing call signals, paging signals, paging response signals, location registration signals, voice channel assignments, maintenance instructions and handoff instructions as the mobile stations travel out of the radio coverage of one cell and into the radio coverage of other cells, as well as other additional items of information such as calling party numbers, time information, and the like. The control or voice channels may operate in either analog or digital mode or a combination thereof based upon industry standards. Integrated services between different cellular telecommunication systems are provided by using the intersystem specification IS-41, which is hereby incorporated by reference herein.

-8-

In cellular telecommunication systems in which most control functions are centralized at the MSC 11, the restricted mobility function may be implemented at the MSC. In cellular telecommunication systems in which control functions are more distributed, the restricted mobility function may be implemented partially at the MSC 11, and partially at the system's base stations B1-B10. The description herein focuses on implementation at a MSC 11, although a distributed implementation is also considered to be within the scope of the invention.

FIGS. 2A and 2B are a flow chart illustrating the functions performed by the present invention when restricting the mobility of a fixed subscriber. At step 21, a subscriber in a cellular telecommunication system is engaged in a call and approaches a cell border. At step 22, the process determines whether or not the subscriber is assigned to a fixed subscription area (FSA). This step may be performed, for example, by having the MSC access a subscriber profile stored in a home location register (HLR) associated with the MSC. If it is determined that the subscriber is not assigned to an FSA, then the subscriber is a mobile subscriber with unrestricted mobility, and the process moves to step 23 and allows handoffs to any neighbor cell. The process then ends at step 24.

If, however, it was determined at step 22 that the subscriber belonged to a FSA, then the process moves to step 25. Each system operator may choose whether to restrict the mobility of fixed subscribers engaged in calls; therefore at step 25, the process determines whether or not the restricted mobility function is active in the subscriber's serving cell. If restricted mobility is not active, the process moves to step 23 and allows handoffs to any neighbor cell. The process then ends at step 24. However, if restricted mobility is active in the cell, then the process moves from step 25 to step 26 where it is determined whether or not handoffs are allowed by

-9-

the operator to neighbor cells that are part of the FSA. If handoffs are not allowed, the process moves to step 27 and performs a handoff evaluation to detect whether the subscriber is crossing a cell border.

5 The process detects a border crossing by determining at step 28 whether or not the neighbor cell is a better cell for serving the mobile station than the currently serving cell. This determination may be made by measuring the relative signal strengths between the mobile station and the base station of the neighbor cell, and between the
10 mobile station and the base station of the currently serving cell. The determination may also be made on the basis of any other measure of voice quality such as, for example, bit error rate, interference level, or carrier-to-interference (C/I) ratio. In digital cellular systems,
15 the handoff evaluation may be performed in the serving base station, with the results being sent to the MSC. In analog cellular systems, the serving base station may perform an evaluation of the quality of the serving
20 channel and send the results to the MSC. The MSC then performs the handoff evaluation. If it is determined at step 28 that the neighbor cell is not better than the serving cell, then the subscriber has not crossed the cell border, and no action is taken. The process returns to
25 step 27 and continues to perform handoff evaluations until it is determined at step 28 that the neighbor cell is better than the serving cell.

 Upon a determination that the neighbor cell is better than the serving cell, the process moves to step 29 (FIG. 2B) where an out-of-cell tone is sent to the subscriber
30 to notify the subscriber that he has left his serving cell. The process then moves to step 30 where an intercell handoff request counter is incremented. The process then moves to step 40 where it is determined
35 whether or not the Call Out of Cell process is started. If it is determined that the Call Out of Cell process is started, the process returns to step 27 (FIG. 2A) and

-10-

continues handoff evaluation. If the Call Out of Cell process is not started, the process moves to step 50 and starts the Call Out of Cell process. The process then returns to step 27 and continues handoff evaluation.

5 If it is determined at step 26 (FIG. 2A) that handoffs are allowed by the operator to neighbor cells that are part of the FSA, then the process moves to step 31 and performs a handoff evaluation to detect whether the subscriber is crossing a cell border. The process detects
10 a border crossing by determining at step 32 whether or not the neighbor cell is a better cell for serving the mobile station than the currently serving cell. If it is determined at step 32 that the neighbor cell is not better than the serving cell, then the subscriber has not crossed
15 the cell border, and no action is taken. The process returns to step 31 and continues to perform handoff evaluations until it is determined at step 32 that the neighbor cell is better than the serving cell.

 Upon a determination that the neighbor cell is better
20 than the serving cell, the process moves to step 33 (FIG. 2B) where it is determined whether or not the neighbor cell is part of the FSA of the subscriber. If the neighbor cell is part of the FSA, then the process moves to step 34 and allows handoff to the neighbor cell. The
25 process then ends at step 35. If the neighbor cell is not part of the FSA, then the process moves to step 36 where an out-of-FSA notification tone is sent to the subscriber. For subscribers with FSAs comprising a single cell, of course, there are no neighbor cells that are part
30 of the area. Therefore, the process always sends such single-cell subscribers a notification tone when they are detected crossing a cell border.

 The process then moves to step 37 where the intercell handoff request counter is incremented. The process then
35 moves to step 38 where it is determined whether or not the Call Out of Cell process is started. If it is determined that the Call Out of Cell process is started, the process

-11-

returns to step 31 (FIG. 2A) and continues handoff evaluation. If the Call Out of Cell process is not started, the process moves to step 39 and starts the Call Out of Cell process. The process then returns to step 31 and continues handoff evaluation.

FIGS. 3A and 3B are a flow chart illustrating the functions performed by the Call Out of Cell process in parallel with the functions illustrated in FIGS. 2A and 2B. In the preferred embodiment of the present invention, a time delay is provided after the notification tone is sent to the subscriber before the call is dropped. The notification tone may enable a fixed subscriber who is inadvertently wandering out of his subscription area to stop or reverse course thereby remaining within his authorized area and completing his call. Those fixed subscribers who choose to continue out of the area are provided notification and given a short time to end their conversation before their call is dropped.

After starting the Call Out of Cell process at step 41, a secure timer is started at step 42 if at least one candidate cell has been accepted as a target cell. The secure timer runs for a predetermined time period which may be, for example, in the range of 15-50 seconds. The secure time period is the period during which the subscriber's call is secure from being dropped by the Call Out of Cell process. An exemplary value of 20 seconds is described herein for illustrative purposes.

At step 43, an intercell handoff request counter is reset to zero (0) and the process thereafter records the number of intercell handoff requests received during the secure time period. At step 44 the process determines whether or not the secure time period has expired. If not, the process remains at step 44 and continues to record the number of intercell handoff requests until the 20-second secure timer expires. At the expiration of the secure time period, the process moves to step 45 and determines whether or not the number of intercell handoff

-12-

requests received at the MSC during the 20 seconds is greater than or equal to a predetermined secure threshold which may be set, for example, in the range of 3-15 handoff requests during the secure time period. An
5 exemplary value of 3 handoff requests is described herein for illustrative purposes. If the number of handoff requests received is less than 3 during the 20-second secure time period, the Call Out of Cell process ends at step 46. If, however, it is determined at step 45 that
10 the number of handoff requests received at the MSC was equal to or greater than 3, then the process moves to step 47 where the intercell handoff request counter is reset to zero (0). At step 48, a drop timer is started and the process moves to step 49 in FIG. 3B.

15 The drop timer runs for a predetermined time period after which the call may be dropped by the Call Out of Cell process. The drop time period may be, for example, in the range of 4-10 seconds. An exemplary value of 5 seconds is chosen for description herein. While the drop
20 timer runs, the process records the number of intercell handoff requests received. At step 49 it is determined whether or not the intercell handoff request counter is greater than or equal to a predetermined drop threshold which may be, for example, in the range of 1-3 handoff
25 requests during the drop time period. An exemplary value of 1 handoff request is described herein for illustrative purposes. If the number of handoff requests received is less than 1 during the 5-second drop time period (e.g., no handoff requests are received), the process moves to
30 step 51 where it is determined whether or not the drop time period has expired. If not, the process returns to step 49 and continues to compare the number of intercell handoff requests with the drop threshold. If the drop timer has expired, the Call Out of Cell process ends at
35 step 52.

If, however, it is determined at step 49 that the intercell handoff request counter was greater than or

-13-

equal to 1, then the process moves to step 53 and optionally notifies the subscriber through a voice message stating that the subscriber's call is being dropped because he has traveled out of his authorized cell. Thereafter, a release order is generated at step 54 and the conversation ends at 55.

It is thus believed that the operation and construction of the present invention will be apparent from the foregoing description. While the method, apparatus and system shown and described has been characterized as being preferred, it will be readily apparent that various changes and modifications could be made therein without departing from the spirit and scope of the invention as defined in the following claims.

-14-

WHAT IS CLAIMED IS:

1. A cellular telecommunication system having a plurality of cells and a plurality of subscribers, said plurality of subscribers including at least one fixed subscriber assigned to a fixed subscription area (FSA) engaged in an on-going call in a serving cell, said system comprising:

a mobile switching center (MSC);

a plurality of base stations electronically connected to said MSC, each of said base stations transmitting radio frequency signals over a coverage area defining one of said cells; and

a restricted mobility function for restricting said on-going call of said fixed subscriber to said FSA.

2. The cellular telecommunication system of claim 1 wherein said restricted mobility function includes means for detecting when said fixed subscriber is crossing a cell border between said serving cell and a neighbor cell.

3. The cellular telecommunication system of claim 2 wherein said restricted mobility function includes means for determining whether said neighbor cell is located in said FSA.

4. The cellular telecommunication system of claim 3 wherein said restricted mobility function includes means for dropping said on-going call of said fixed subscriber when said fixed subscriber is detected crossing a cell border between said serving cell and a neighbor cell, and upon determining that said neighbor cell is located outside said FSA.

5. The cellular telecommunication system of claim 4 further comprising means for determining whether handoffs are allowed from said serving cell to said

-15-

neighbor cell when said neighbor cell is located in said FSA.

6. The cellular telecommunication system of claim 5 further comprising means for allowing handoff of said fixed subscriber from said serving cell to said neighbor cell upon determining that said neighbor cell is located in said FSA, and upon determining that handoffs are allowed from said serving cell to said neighbor cell when said neighbor cell is located in said FSA.

7. The cellular telecommunication system of claim 6 wherein said means for dropping said on-going call of said fixed subscriber includes:

means for determining whether a threshold has been exceeded; and

means for generating a release order upon determining that said threshold has been exceeded.

8. The cellular telecommunication system of claim 7 wherein said means for determining whether a threshold has been exceeded includes:

a secure timer for defining a secure time period during which said means for dropping said on-going call is prohibited from dropping said call;

means for recording the number of intercell handoff requests received during said secure time period; and

means for determining whether the number of intercell handoff requests received during said secure time period is greater than or equal to a predetermined secure threshold.

9. The cellular telecommunication system of claim 8 wherein said means for determining whether a threshold has been exceeded further comprises:

a drop timer for defining a drop time period;

-16-

means for starting said drop timer upon determining that the number of intercell handoff requests received during said secure time period is greater than or equal to said predetermined secure threshold;

means for recording the number of intercell handoff requests received during said drop time period; and

means for determining whether the number of intercell handoff requests received during said drop time period is greater than or equal to a predetermined drop threshold.

10. The cellular telecommunication system of claim 1 further comprising means for determining whether each of said plurality of subscribers is assigned to a FSA.

11. The cellular telecommunication system of claim 10 further comprising means for allowing handoffs of each of said plurality of subscribers to any neighbor cell upon determining that each of said plurality of subscribers is not assigned to a FSA.

12. In a cellular telecommunication system having a plurality of cells and a plurality of subscribers, said plurality of subscribers including at least one fixed subscriber assigned to a fixed subscription area (FSA) engaged in an on-going call in a serving cell, a method of restricting said on-going call of said fixed subscriber to said FSA, said method comprising the steps of:

detecting when said fixed subscriber is crossing a cell border between said serving cell and a neighbor cell; determining whether said neighbor cell is located in said FSA; and

dropping said on-going call of said fixed subscriber upon determining that said neighbor cell is located outside said FSA.

13. The method of restricting said on-going call of said fixed subscriber to said FSA of claim 12 further

-17-

comprising the step of determining whether handoffs are allowed from said serving cell to said neighbor cell when said neighbor cell is located in said FSA.

14. The method of restricting said on-going call of said fixed subscriber to said FSA of claim 13 further comprising the step of allowing handoff of said fixed subscriber from said serving cell to said neighbor cell upon determining that said neighbor cell is located in said FSA, and upon determining that handoffs are allowed from said serving cell to said neighbor cell when said neighbor cell is located in said FSA.

15. The method of restricting said on-going call of said fixed subscriber to said FSA of claim 14 wherein said step of dropping said on-going call of said fixed subscriber includes the steps of:

determining whether a threshold has been exceeded;
and

generating a release order upon determining that said threshold has been exceeded.

16. The method of restricting said on-going call of said fixed subscriber to said FSA of claim 15 wherein said step of determining whether a threshold has been exceeded includes the steps of:

defining a secure time period during which said means for dropping said on-going call is prohibited from dropping said call;

recording the number of intercell handoff requests received during said secure time period; and

determining whether the number of intercell handoff requests received during said secure time period is greater than or equal to a predetermined secure threshold.

17. The method of restricting said on-going call of said fixed subscriber to said FSA of claim 16 wherein said

-18-

step of determining whether a threshold has been exceeded further comprises:

defining a drop time period;

starting said drop time period upon determining that the number of intercell handoff requests received during said secure time period is greater than or equal to said predetermined secure threshold;

recording the number of intercell handoff requests received during said drop time period; and


determining whether the number of intercell handoff requests received during said drop time period is greater than or equal to a predetermined drop threshold.

18. The method of restricting said on-going call of said fixed subscriber to said FSA of claim 12 further comprising the step of determining whether each of said plurality of subscribers is assigned to a FSA.

19. The method of restricting said on-going call of said fixed subscriber to said FSA of claim 18 further comprising the step of allowing handoffs of each of said plurality of subscribers to any neighbor cell upon determining that each of said plurality of subscribers is not assigned to a FSA.


1 / 5

FIG. 1

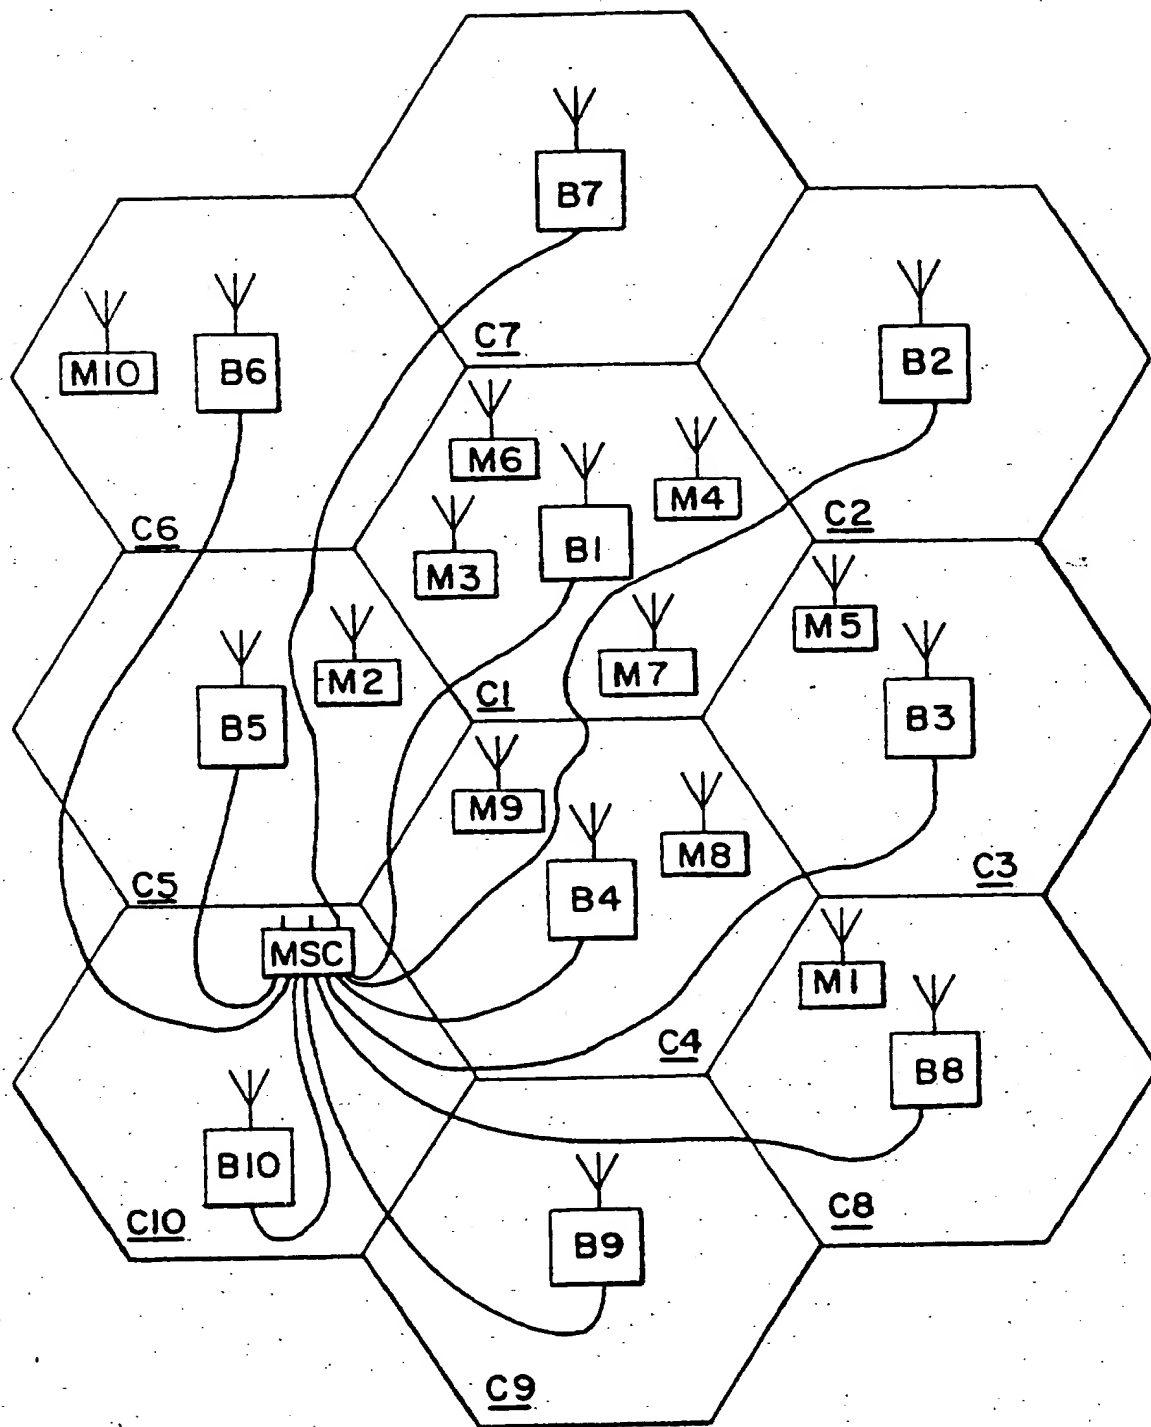

2 / 5

FIG. 2A

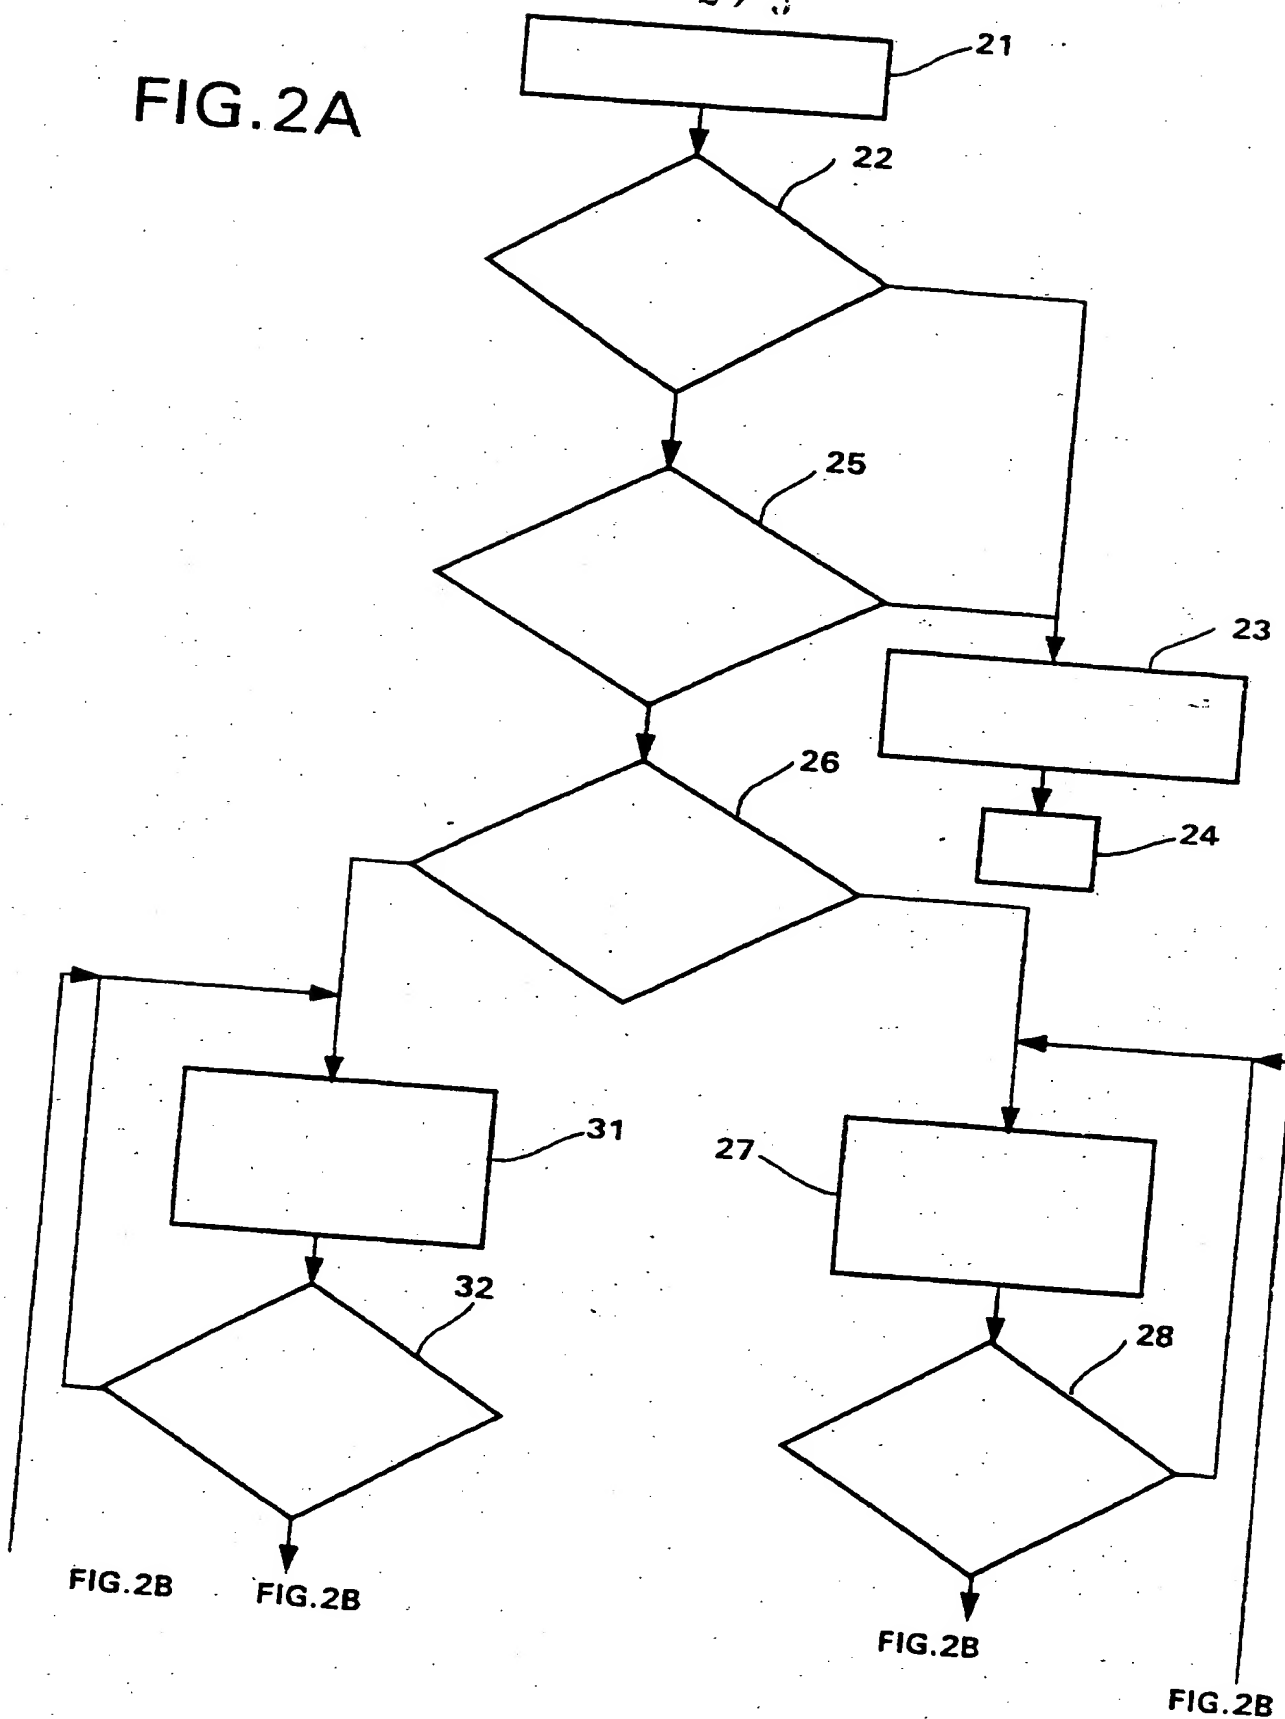


3 / 5

FIG. 2B

FIG. 2A

FIG. 2A

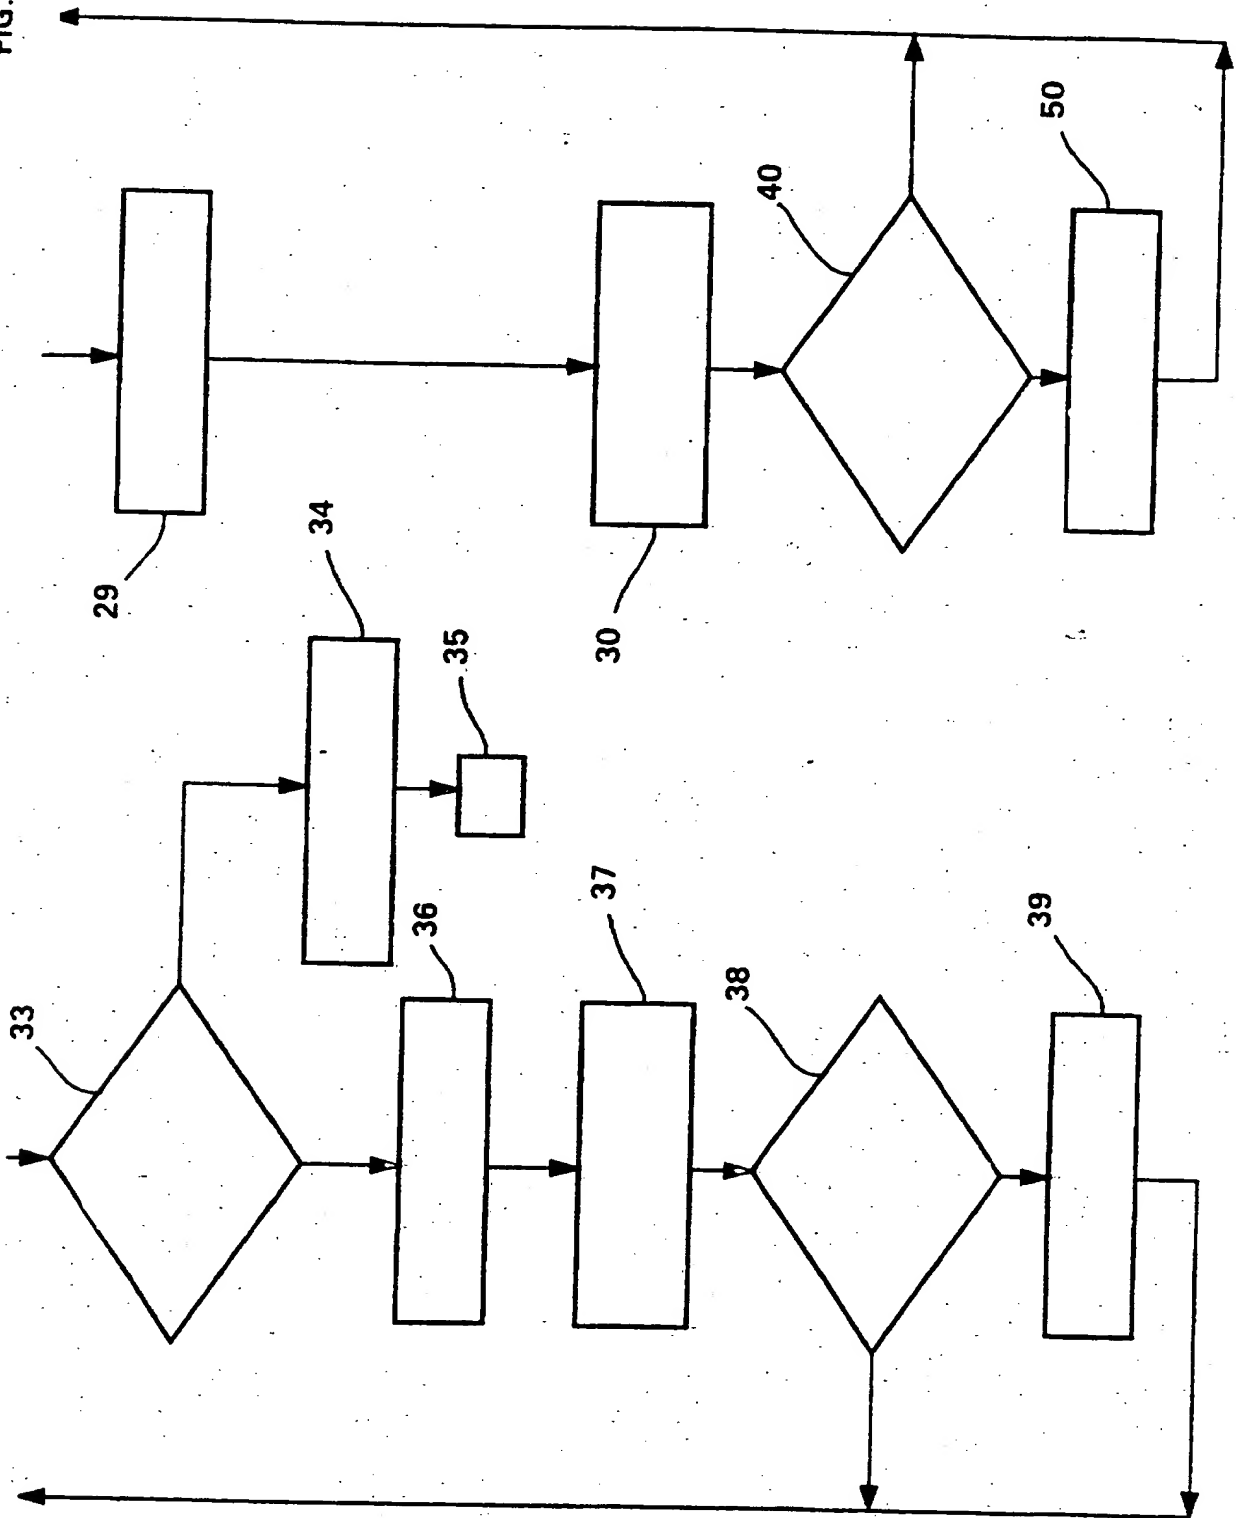

4 / 5

FIG. 3A


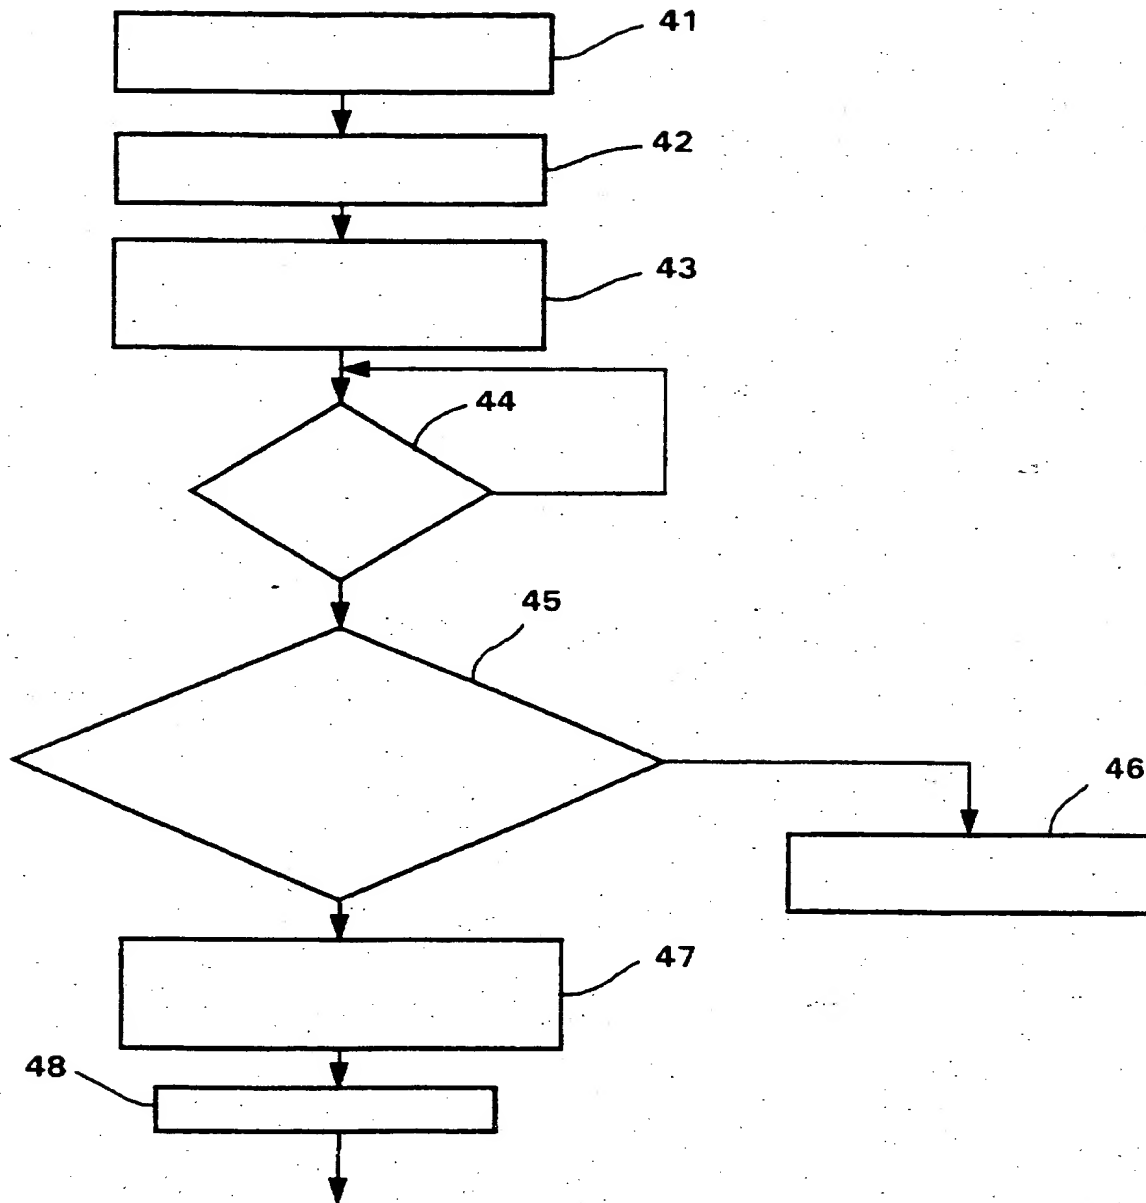


FIG. 3B

3 / 5

FIG.3B

FIG.3A

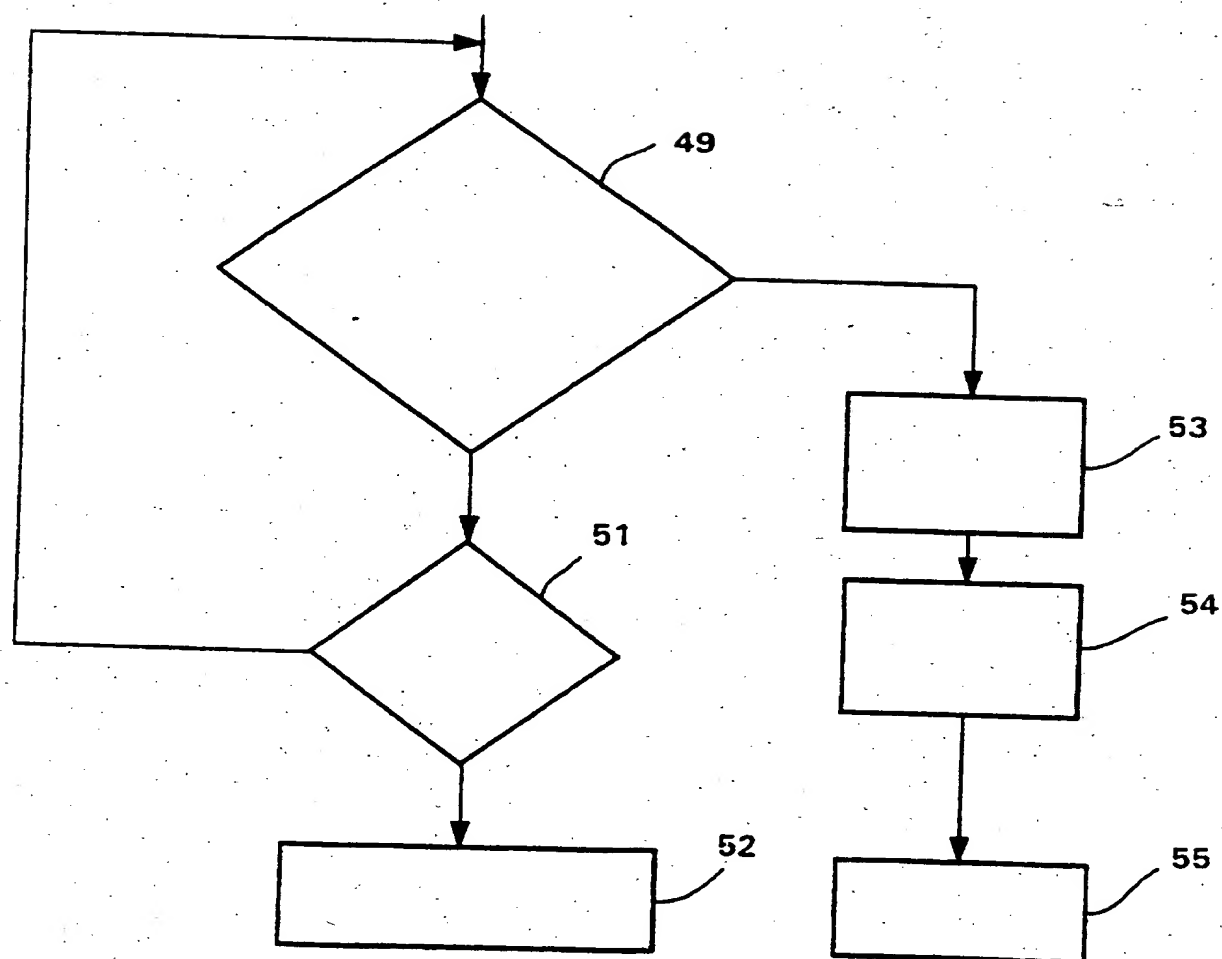

INTERNATIONAL SEARCH REPORT

International Application No
PCT/SE 96/00389

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>EP,A,0 505 106 (VODAFONE LTD) 23 September 1992</p> <p>see column 2, line 12 - line 52 see column 4, line 3 - column 5, line 22 see column 5, line 53 - column 6, line 22 see column 6, line 55 - column 7, line 30; figures</p> <p style="text-align: center;">-----</p>	<p>1-6, 10-14, 18,19</p>

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

6 September 1996

Date of mailing of the international search report

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Janyaszek, J-M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 96/00389

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0505106	23-09-92	GB-A- 2253968	23-09-92

This Page Blank (uspto)

ORIGINAL
NO MARGINALIA